



RFID SupraTag

Compliant




Catalog No.Supra-2021.1



RFID SupraTag

Item No. 13243

Functionality	
RF Protocol	ISO 15693
Operating Frequency	HF - 13.56 MHz
Memory Configuration	16 Character UID, 2000 bits User
R/W Capability	Read / Write
Performance	
Read Range	Maximum to 5 mm (0.2")
Quality Guarantee	100 %
Orientation	Front Face Read
IP Rating	IP68
Physical	
Material	Tag : PA 6 + 30 GF Plate : Stainless Steel Housing : Forged Stainless Steel
Mounting System	Universal Use
Color	Tag : Turquoise Blue Plate & Housing : Polished
Operational	
Max Temperature Exposure	125 °C / 257 °F
Min Temperature Exposure	-30 °C / -22 °F
Continuous Max Service Temperature	125 °C / 257 °F
Continuous Min Service Temperature	-30 °C / -22 °F
Water and Ice Proof	Yes
Dimensions	
Weight	33 g / 1.16 oz
Dimensions	50 x 30 mm
Thickness	Metal Plate : 3 mm Metal Plate + Housing : 10 mm

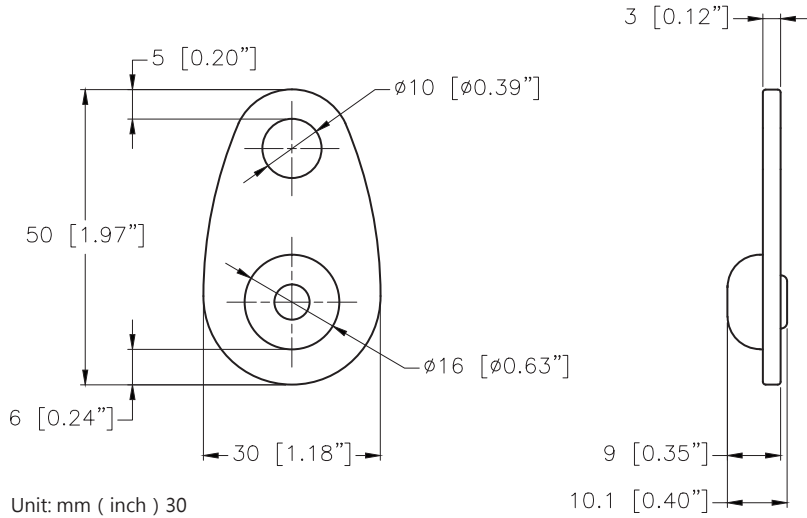

- Corrosion resistant stainless steel.
- Meets the requirements of US Military Standard MIL-STD-810H.
- IK10 impact protection level.
- Highest IP rating of dust & water resistance.
- Unique design of proprietary wafer-antenna chip construction.
- Patents in several countries.
- By using the RFID SupraTag with a third-party asset management application, you can access product traceability, manufacturer authentication and digitized product information such as its location and latest inspection record.

Compliant





Safety is our first priority™

YOKE INDUSTRIAL CORP.

An ISO 9001 Registered Company

#39, 33rd Road,
Taichung Industrial Park,
Taichung 407,
TAIWAN

Tel:+886-4-2350-8088

Fax:+886-4-2350-1001

E-mail: info@mail.yoke.net

www.yoke.net